

WIRE CONNECTOR, TERMINAL

TERMINAL:

Material: Brass/Tin plated

Applicable wire: AWG 22-28

Current/voltage: 3A/300V

Temperature Range: - 25°C ~ + 85°C(Including temperature rise)


Contact Resistance: Initial Value / 10MΩ max.

After environmental testing / 20MΩ max.


Insulation Resistance: 500MΩ/ min.

Withstand voltage: 1,000 V AC/min.

Part No.
6025-BS2




3025-BS2




Unit: mm


SMM-2P




SMF-2P

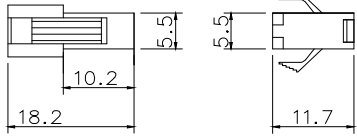


SMM-7P




SMF-7P

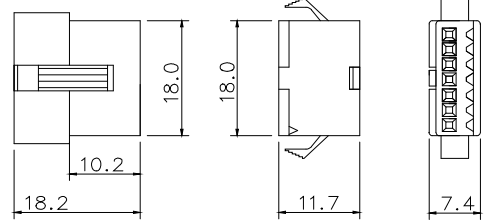


SMM-3P




SMF-3P

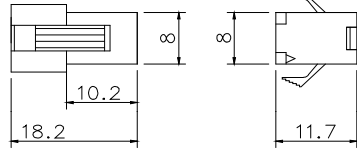


SMM-8P




SMF-8P

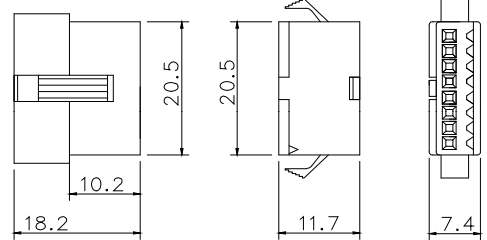


SMM-4P




SMF-4P

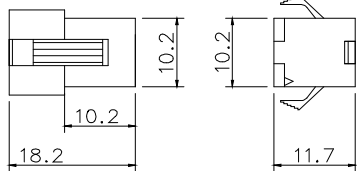


SMM-9P




SMF-9P

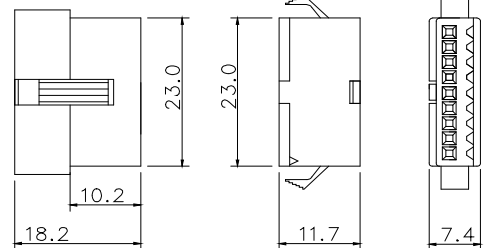


SMM-5P




SMF-5P

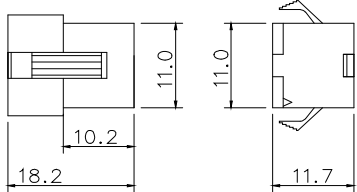


SMM-10P




SMF-10P

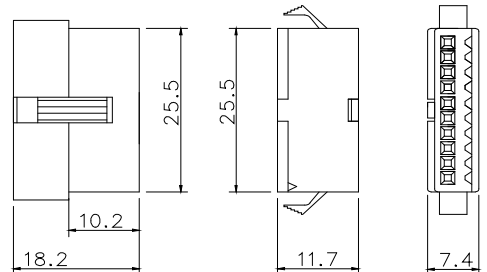


SMM-6P



SMF-6P

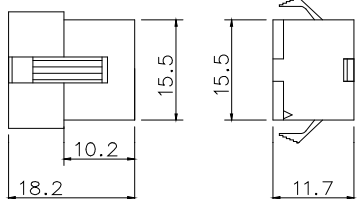

SMM-18P



SMF-18P

